

CRIBLE À ÉTOILES

Utilisés pour le traitement des stériles en carrière ou en recyclage, ces appareils sont préconisés dans le traitement à sec des matériaux colmatants et pollués.



- Ils se placent après scalpage primaire
- Ils permettent de réintégrer et de nettoyer tout ou partie des matériaux stériles
- Granulométrie variable
- Existents en version fixe ou mobile

Caractéristiques :

- De conception identique au scalpeur à disque primaire
- De 4 à 7 m² de surface, de 50 à 200 t/h de 0/30 à 0/60 mm
- Étoiles caoutchouc ou acier montées sur arbres à entraînement multiple
- Double ou triple motorisation (variable)
- Appareil entièrement confiné par structure et capotage robuste.

Options :

- Graissage centralisé
- Variateur de fréquence

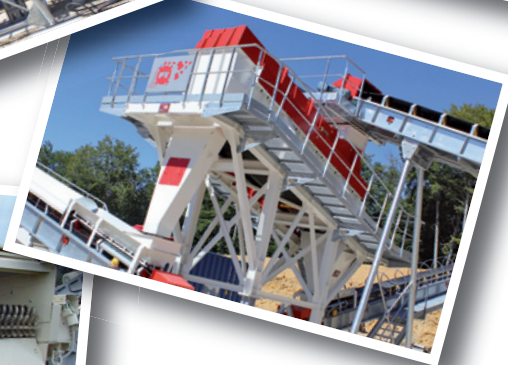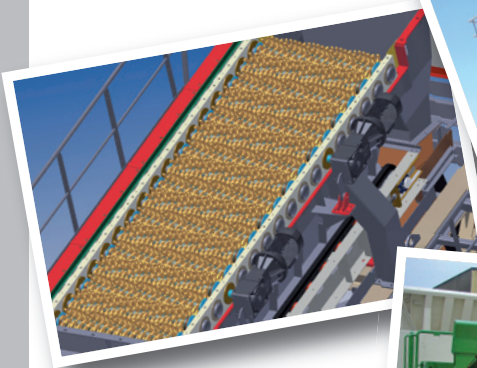

ROLLER STAR SCREEN

Used for waste materials process for quarries and recycling, equipment recommended to choking and polluting materials for dry processing.

- Positioned after primary scalping, it can re-integrate some waste materials
- Variable output size
- Stationary and mobile plants

Specifications:

- The same design to roller grizzly screen
- Area to 4 to 7 m², output to 50 to 200 tph to 0/30 to 0/60 mm
- Rubber or steel stars mounted to shaft with double or triple drive with speed variable
- Dustproofness

Options:

- Centralized greasing system
- Frequency variator

